


Power+ TOPCON FACIAL HALF CELL MODULE

SL5N132

615 | 620 WATT

ELECTRICAL DATA	STC	NMOT	STC	NMOT
Rated Power In Watts-Pmax (Wp)	615	466	620	470
Maximum Power Voltage-Vmpp (V)	39.94	37.55	40.11	37.72
Maximum Power Current-Impp (A)	15.40	12.41	15.46	12.46
Open Circuit Voltage-Voc (V)	48.30	45.88	48.50	46.07
Short Circuit Current-Isc (A)	16.10	12.99	16.15	13.03
Module Efficiency (%)	22.8%	/	23.0%	/


STC: Irradiation 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
 NOCT: Irradiation: 800 W/m², ambient temperature: 20°C, air mass: 1.5, wind speed 1 m/s

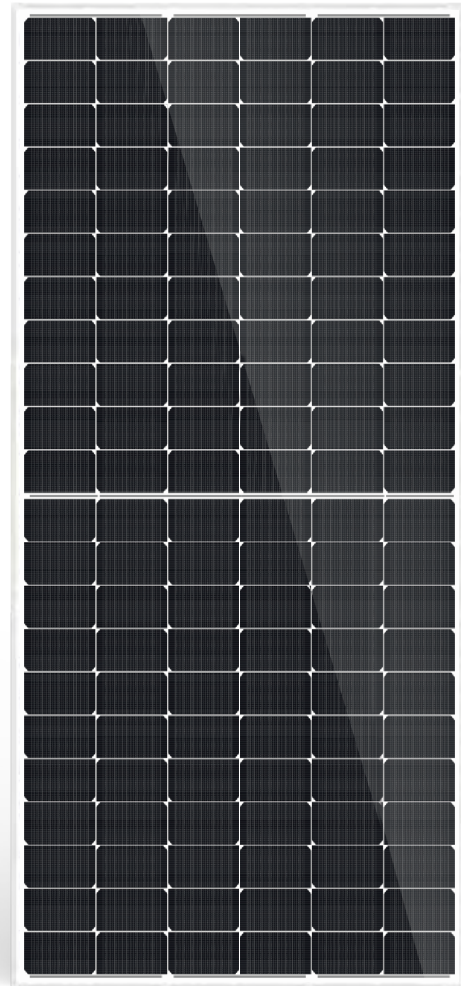

MECHANICAL CHARACTERISTICS	
Solar Cells	Monocrystalline, SMBB
Cell Configuration	132cells(6*11*2)
Module Dimensions	2382*1134*30mm
Weight	27.5kg
Glass	High Transmission, Low Iron, Tempered ARC Glass
Back Sheet	White Back-sheet
Frame	Anodized Aluminium Alloy, Silver
J-box	IP68, 3 bypass diodes
Cables	4mm ² , (+)380mm, (-)380mm or customized length
Connector	MC4 Compatible

TEMPERATURE AND MAXIMUM RATINGS	
Nominal Module Operating Temperature(NMOT)	44±2°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	30A


PACKAGING CONFIGURATION	
Container Type	40FT(HQ)
Number of Modules Per Container	720
Number of Modules Per Pallet	36
Number of Pallets Per Container	20

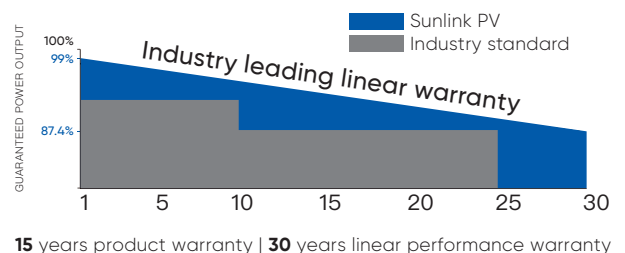


POWER+ TOPCON FACIAL HALF CELL MODULE

SL5N132 615 | 620 WATT


BACK OVERVIEW

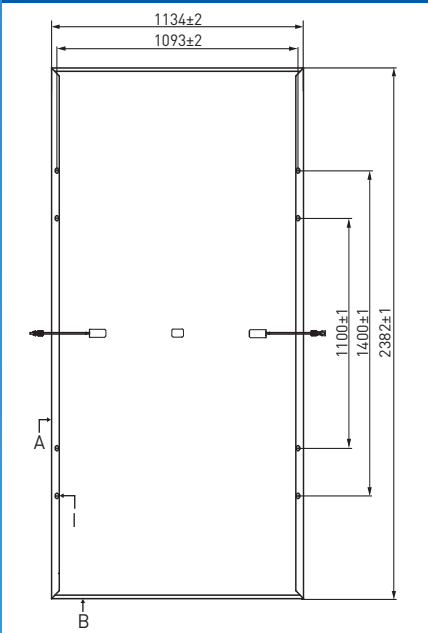

DRAWINGS (MM)

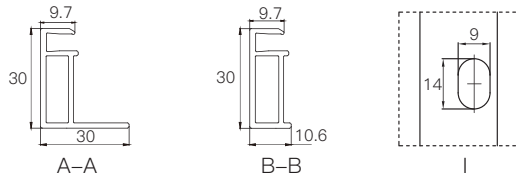

CURRENT-VOLTAGE & POWER-VOLTAGE CURVES (SL5N132)

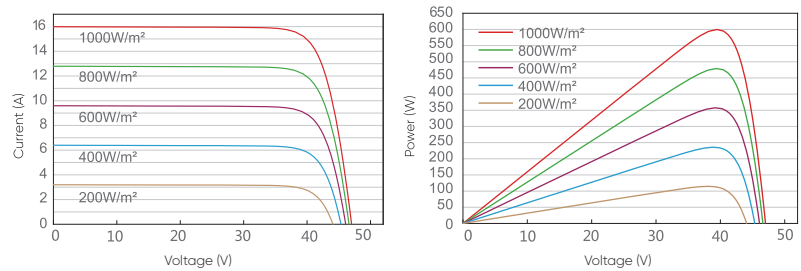

HIGHLIGHTS

$$+ \frac{W}{m^2}$$

HIGHER EFFICIENCY

- Module efficiency high to 23.0% ensure less BOS cost
- Gain more solar power per square meter

$$\frac{15}{30}$$

LONGER WARRANTY

- N-type TOPCON technology ensures 15-year product warranty and 30-year power warranty

$$\leq 1\%$$

$$\leq 0.4\%$$

LESS DEGRADATION

- 1st year degradation < 1%
- Annual degradation < 0.4%

$$\frac{\%}{^{\circ}C}$$

$$-0.3$$

LOWER TEMPERATURE COEFFICIENT OF P_{MAX}

- TOPCON modules' coefficient of P_{max} low to -0.3%/ C helps gaining more power at sunny days.